

PALOMA[®]
ITALY



Excellent
Smart Digital Lock





www.palomahardware.com

Digital Lock 6200



1 2 3
4 5 6
7 8 9
* 0 #
← 0 →

PALOMA






LIVE VIEW ANYTIME



GUEST VIDEO CALL



**BIG CAPACITY
5000mAh
RECHARGEABLE
LITHIUM BATTERY**

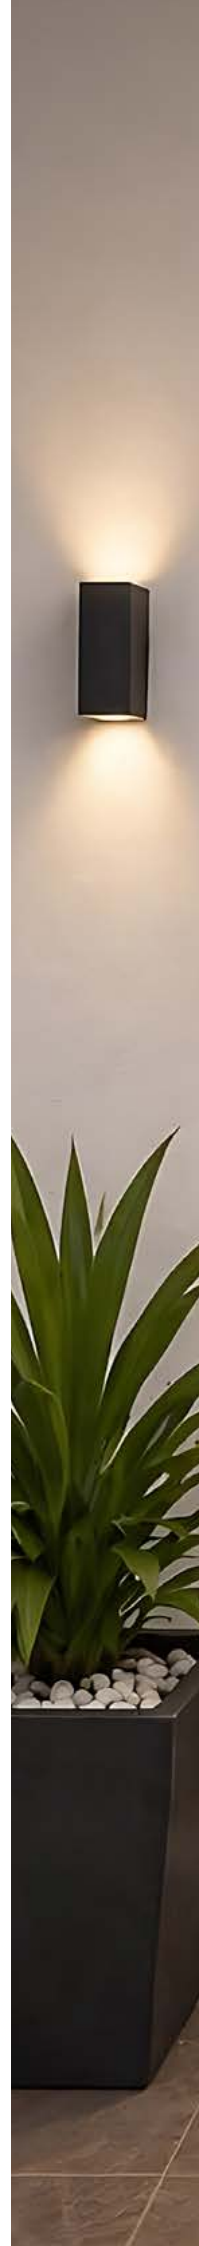





DLP 6201YMB: Matte Black (Tuya Wi-Fi)


DLP 6201DMB: Matte Black (Dummy)

Door Thickness:
40mm - 120mm

Door Frame:
Min. 100mm


Capacity Admin & User

Face Recognition : max 20
Palm Recognition : max 20
Fingerprint : max 100
RFID Card : max 50
PIN Code : max 50

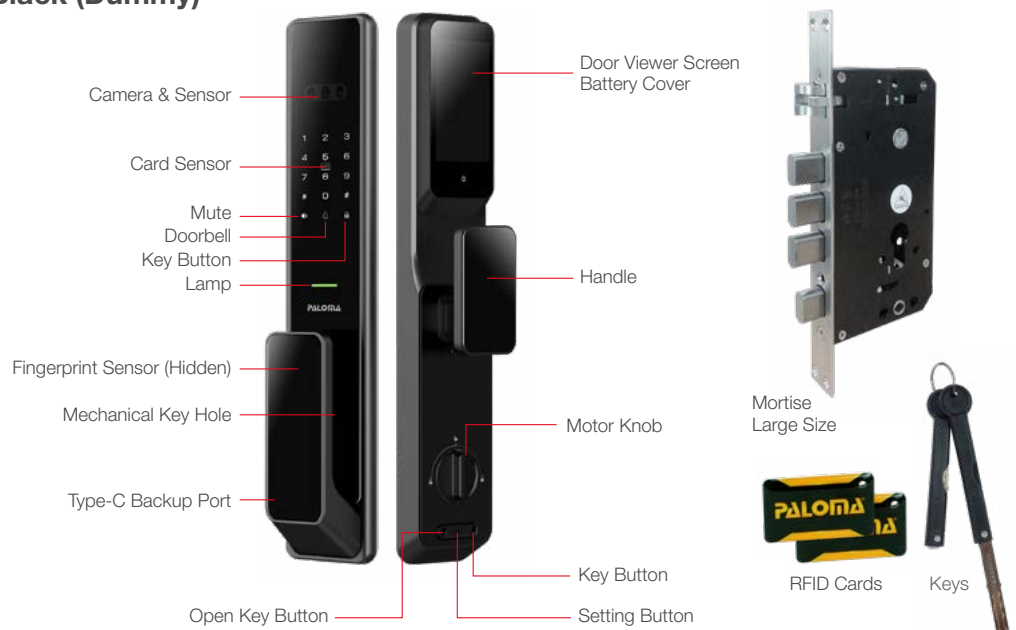

Specification

- Panel material: Aluminium alloy & Glass
- Mortise: Stainless steel SUS 304, backset 60mm
- Cylinder & Key: Full brass, high security grade
- Fingerprint sensor: Semiconductor capacitive (FPC Sweden)
- RFID reader: Non-contact induction (MIFARE 1K 13.56 Mhz)
- Numpad: Touchscreen
- Power Backup Port: Type-C
- Voltage: DC 6.5 - 8.4 V
- Operating Temperature: -15°C - 70°C
- Operating Humidity: 20% - 90% RH

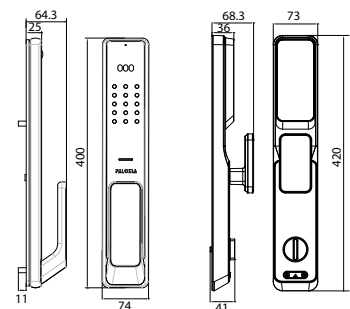

Features

Multiple Access

- Smartphone App (Android & iOS)
- Face Recognition
- Palmpoint Recognition
- Fingerprint (hidden)
- PIN Code
- RFID Card: MIFARE 13.56 Mhz
- Mechanical Key

User Management

- 5 Admins & 235 Users
- Unlocking Records & Notification

Easy Operation



- Live View Anytime
- Video Call
- Touch Screen
- Passage Mode
- Doorbell

High Security

- Automatic Locking
- Mortise SUS 304
- With Privacy Deadbolt
- Hardened Solid Deadbolt
- High Security Cylinder & Key
- Dual Verification Mode
- Doorbell
- Anti-Theft Fake PIN
- Anti-Burglar Alarm
- Dust & Splash Proof

Battery

- Rechargeable Lithium Battery (x2)
- 5000 mAh Battery Capacity
- Low Battery Notification
- Type-C Backup Port




DLP 6202YMB: Matte Black (Tuya Wi-Fi) DLP 6202DMB: Matte Black (Dummy)

Door Thickness:
40mm - 120mm

Door Frame:
Min. 100mm


Capacity Admin & User

Face Recognition : max 20
Palm Recognition : max 20
Fingerprint : max 100
RFID Card : max 50
PIN Code : max 50

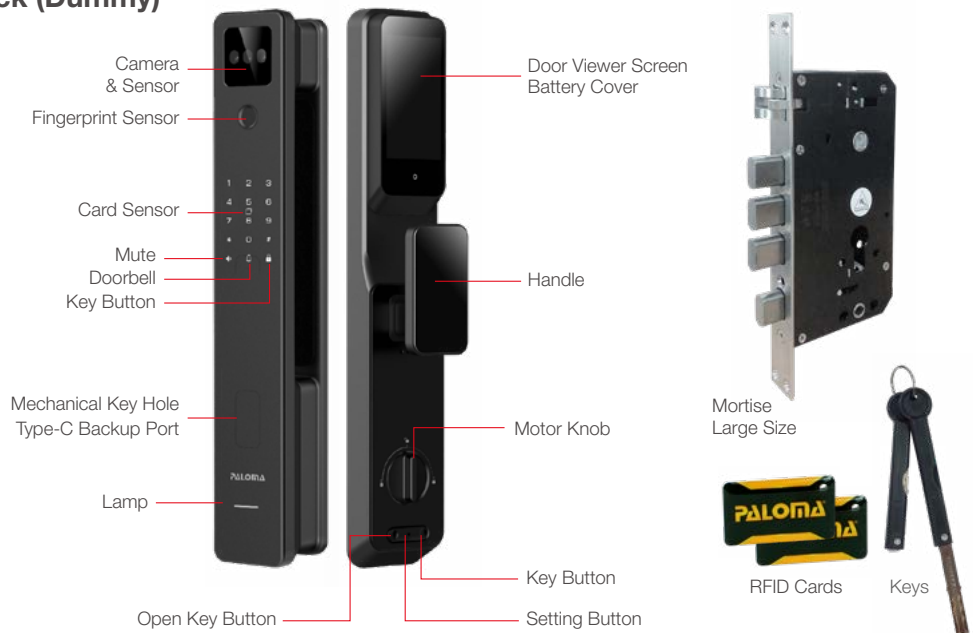

Specification

- Panel material: Aluminium alloy & polycarbonate
- Mortise: Stainless steel SUS 304, backset 60mm
- Cylinder & Key: Full brass, high security grade
- Fingerprint sensor: Semiconductor capacitive (FPC Sweden)
- RFID reader: Non-contact induction (MIFARE 1K 13.56 Mhz)
- Numpad: Touchscreen
- Power Backup Port: Type-C
- Voltage: DC 6.5 - 8.4 V
- Operating Temperature: -15°C - 70°C
- Operating Humidity: 20% - 90% RH



Features

Multiple Access

- Smartphone App (Android & iOS)
- Face Recognition
- Palmprint Recognition
- Fingerprint
- PIN Code
- RFID Card: MIFARE 13.56 Mhz
- Mechanical Key

User Management

- 5 Admins & 235 Users
- Unlocking Records & Notification

Easy Operation



- Live View Anytime
- Video Call
- Touch Screen
- Passage Mode
- Doorbell

High Security

- Automatic Locking
- Mortise SUS 304
- With Privacy Deadbolt
- Hardened Solid Deadbolt
- High Security Cylinder & Key
- Dual Verification Mode
- Doorbell
- Anti-Theft Fake PIN
- Anti-Burglar Alarm
- Dust & Splash Proof

Battery

- Rechargeable Lithium Battery (x2)
- 5000 mAh Battery Capacity
- Low Battery Notification
- Type-C Backup Port



DLP 6203YMB: Matte Black (Tuya Wi-Fi)


DLP 6203DMB: Matte Black (Dummy)

Door Thickness:
40mm - 120mm

Door Frame:
Min. 100mm


Capacity Admin & User

Face Recognition : max 20
Palm Recognition : max 20
Fingerprint : max 100
RFID Card : max 50
PIN Code : max 50

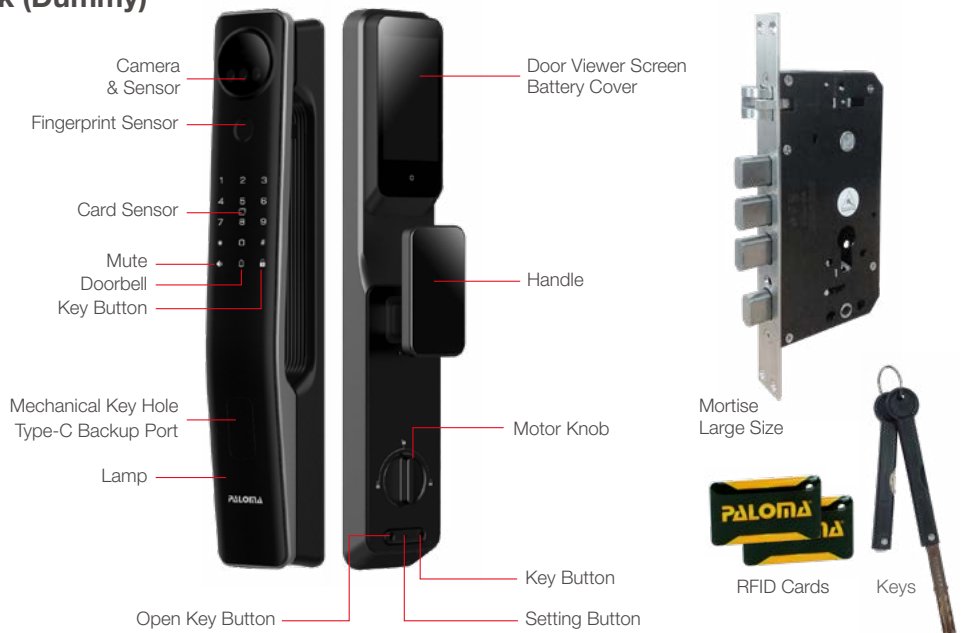

Specification

- Panel material: Aluminium alloy & polycarbonate
- Mortise: Stainless steel SUS 304, backset 60mm
- Cylinder & Key: Full brass, high security grade
- Fingerprint sensor: Semiconductor capacitive (FPC Sweden)
- RFID reader: Non-contact induction (MIFARE 1K 13.56 Mhz)
- Numpad: Touchscreen
- Power Backup Port: Type-C
- Voltage: DC 6.5 - 8.4 V
- Operating Temperature: -15°C - 70°C
- Operating Humidity: 20% - 90% RH



Features

Multiple Access

- Smartphone App (Android & iOS)
- Face Recognition
- Palmpoint Recognition
- Fingerprint
- PIN Code
- RFID Card: MIFARE 13.56 Mhz
- Mechanical Key

User Management

- 5 Admins & 235 Users
- Unlocking Records & Notification

Easy Operation



- Live View Anytime
- Video Call
- Touch Screen
- Passage Mode
- Doorbell

High Security

- Automatic Locking
- Mortise SUS 304
- With Privacy Deadbolt
- Hardened Solid Deadbolt
- High Security Cylinder & Key
- Dual Verification Mode
- Doorbell
- Anti-Theft Fake PIN
- Anti-Burglar Alarm
- Dust & Splash Proof


Battery

- Rechargeable Lithium Battery (x2)
- 5000 mAh Battery Capacity
- Low Battery Notification
- Type-C Backup Port



Digital Lock 6000



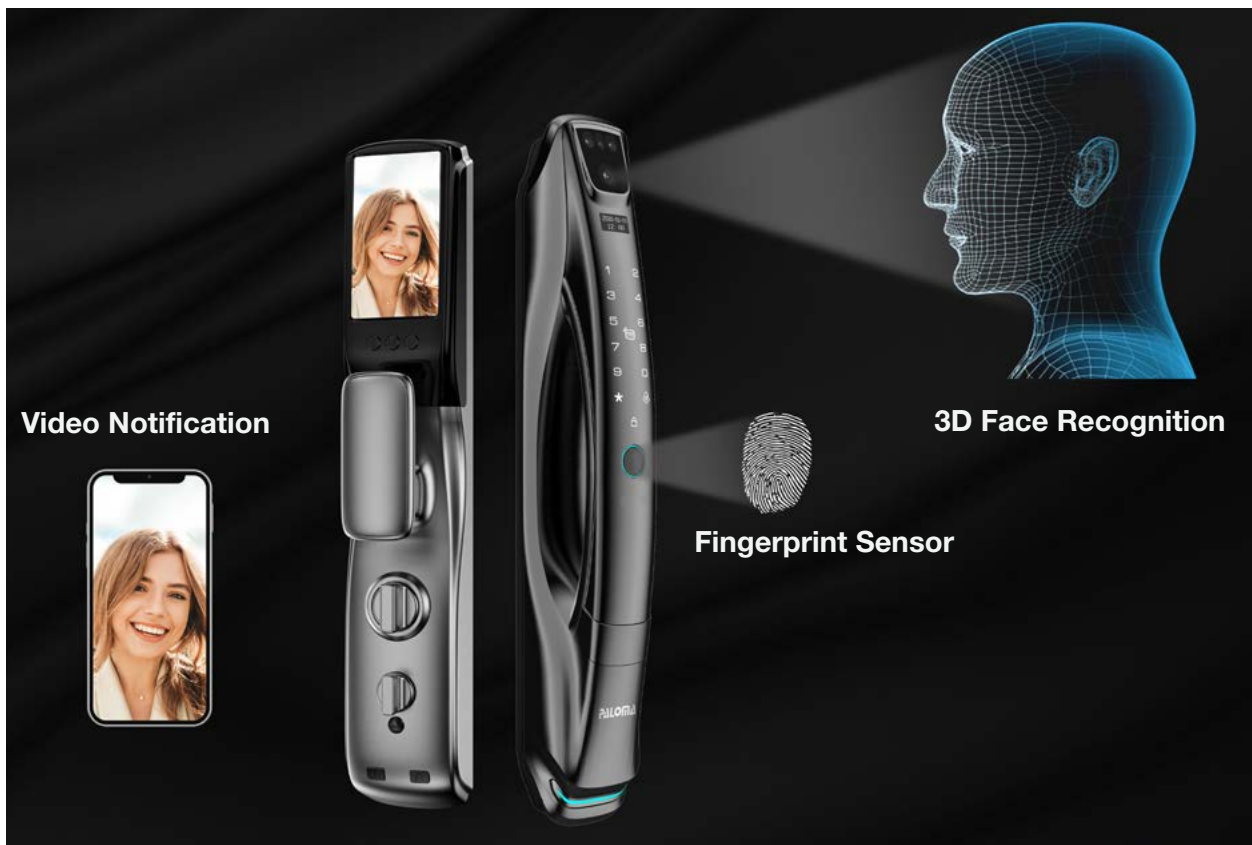

3D Face Recognition

Recognize faces quickly and accurately.

Video Notification

Can make video calls via cell phone.

RECHARGEABLE LITHIUM BATTERY

The battery can be recharged using a charger or power bank with a micro-USB cable.



DLP 6000: Gunmetal (Tuya Wi-Fi) DLP 6000D: Gunmetal (Dummy)

Door Thickness:
40mm - 100mm

Door Frame:
Min. 100mm


Capacity Admin & User

Face Recognition : max 50
Fingerprint : max 50
RFID Card : max 250
PIN Code : max 250



Specification

- Panel material: Aluminium alloy
- Mortise: Full stainless steel SUS 304, backset 60mm
- Cylinder & Key: Full brass, high security grade
- Fingerprint sensor: Semiconductor capacitive (FPC Sweden)
- RFID reader: Non-contact induction (MIFARE 1K 13.56 Mhz)
- Numpad: Touchscreen
- Power Backup Port: Micro-USB
- Voltage: DC 4.5 - 6.0 V
- Operating Temperature: -10°C - 60°C
- Operating Humidity: 10% - 95% RH



Features

Multiple Access

- Smartphone App (Android & iOS)
- Face Recognition
- Fingerprint
- PIN Code
- RFID Card: MIFARE 13.56 Mhz
- Mechanical Key

User Management

- 10 Admins & 240 Users
- Unlocking Records & Notification

Easy Operation



- Camera as Door Viewer
- Video Notification
- Touch Screen
- Passage Mode
- Doorbell

High Security

- Automatic Locking
- Mortise Full SUS 304
- With Privacy Deadbolt
- Hardened Solid Deadbolt
- High Security Cylinder & Key
- Dual Verification Mode
- Anti-Theft Fake PIN
- Anti-Burglar Alarm
- Dust & Splash Proof

Battery

- Rechargeable Lithium Battery (x2)
- Low Battery Notification
- Micro-USB Backup Port





DLP 6001GM: Gunmetal (Tuya Wi-Fi) DLP 6001DGM: Gunmetal (Dummy)

Door Thickness:
40mm - 100mm

Door Frame:
Min. 100mm


Capacity Admin & User

Face Recognition : max 50
Fingerprint : max 50
RFID Card : max 100
PIN Code : max 100



Specification

- Panel material: Aluminium alloy
- Mortise: Full stainless steel SUS 304, backset 60mm
- Cylinder & Key: Full brass, high security grade
- Fingerprint sensor: Semiconductor capacitive (FPC Sweden)
- RFID reader: Non-contact induction (MIFARE 1K 13.56 Mhz)
- Numpad: Touchscreen
- Power Backup Port: Type-C
- Voltage: DC 4.9 - 6.0 V
- Operating Temperature: -25°C - 70°C
- Operating Humidity: 15% - 93% RH



Features

Multiple Access

- Smartphone App (Android & iOS)
- Face Recognition
- Fingerprint
- PIN Code
- RFID Card: MIFARE 13.56 Mhz
- Mechanical Key

User Management

- 10 Admins & 240 Users
- Unlocking Records & Notification

Easy Operation



- Camera as Door Viewer
- Video Notification
- Touch Screen
- Passage Mode
- Doorbell

High Security

- Automatic Locking
- Mortise Full SUS 304
- With Privacy Deadbolt
- Hardened Solid Deadbolt
- High Security Cylinder & Key
- Dual Verification Mode
- Anti-Theft Fake PIN
- Anti-Burglar Alarm
- Dust & Splash Proof

Battery

- Rechargeable Lithium Battery (x2)
- Low Battery Notification
- Type-C Backup Port



Digital Lock 415




DLP 415B: Black (Tuya Wi-Fi)



Specification

- Panel material: Zamak alloy
- Mortise: Deadbolt type, backset adjustable 60/70mm
- Cylinder & Key: Full brass
- Fingerprint sensor: Semiconductor capacitive (FPC Sweden)
- RFID reader: Non-contact induction (MIFARE 1K 13.56 Mhz)
- Numpad: Touchscreen
- Power Backup Port: Type-C
- Voltage: DC 5.0 - 6.0 V
- Operating Temperature: -20°C ~ 70°C
- Operating Humidity: 20% ~ 80% RH

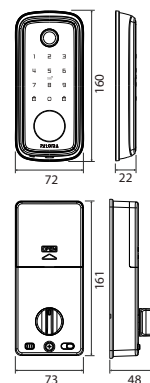

Features

Multiple Access

- Smartphone App (Android & iOS)
- Fingerprint
- PIN Code
- RFID Card: MIFARE 13.56 Mhz
- Mechanical Key

User Management

- 9 Admins & 291 Users
- Unlocking Records & Notification

Easy Operation



- Touch Screen
- Passage Mode
- Magnetic Sensor (Optional)

High Security

- Automatic Locking
- Mortise SUS 304
- With Privacy Button
- Hardened Solid Deadbolt
- Dual Verification Mode
- Anti-Theft Fake PIN
- Dust & Splash Proof


Battery

- Low Battery Notification
- Alkaline AA x 4pcs
- Type-C Backup Port




Digital Lock 415

DLP 415S: Silver (Tuya Wi-Fi)

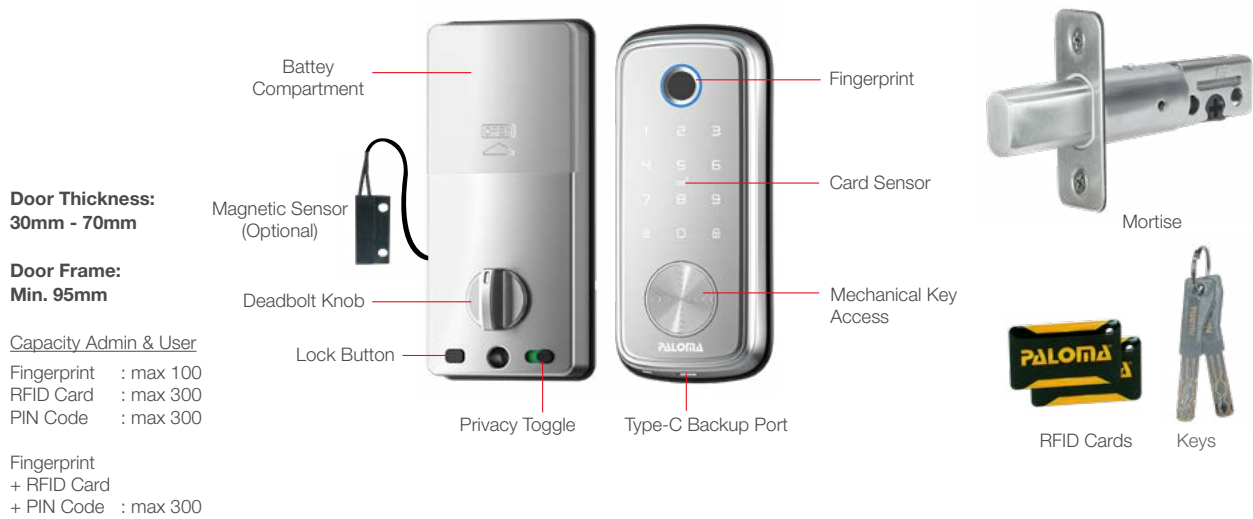

Specification

- Panel material: Zamak alloy
- Mortise: Deadbolt type, backset adjustable 60/70mm
- Cylinder & Key: Full brass
- Fingerprint sensor: Semiconductor capacitive (FPC Sweden)
- RFID reader: Non-contact induction (MIFARE 1K 13.56 Mhz)
- Numpad: Touchscreen
- Power Backup Port: Type-C
- Voltage: DC 5.0 - 6.0 V
- Operating Temperature: -20°C - 70°C
- Operating Humidity: 20% - 80% RH

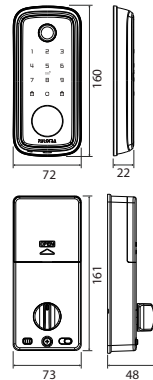

Features

Multiple Access

- Smartphone App (Android & iOS)
- Fingerprint
- PIN Code
- RFID Card: MIFARE 13.56 Mhz
- Mechanical Key

User Management

- 9 Admins & 291 Users
- Unlocking Records & Notification

Easy Operation



- Touch Screen
- Passage Mode
- Magnetic Sensor (Optional)

High Security

- Automatic Locking
- Mortise SUS 304
- With Privacy Button
- Hardened Solid Deadbolt
- Dual Verification Mode
- Anti-Theft Fake PIN
- Dust & Splash Proof

Battery

- Low Battery Notification
- Alkaline AA x 4pcs
- Type-C Backup Port



Digital Lock 4100




DLP 4121: Matte Black (Tuya Wi-Fi)



Specification

- Panel material: Aluminium alloy, acrylic
- Mortise: Deadbolt type, backset adjustable 60/70mm
- Cylinder & Key: Full brass, 5 security pins
- Fingerprint sensor: Semiconductor capacitive (FPC Sweden)
- RFID reader: Non-contact induction (MIFARE 1K 13.56 Mhz)
- Numpad: Touchscreen
- Power Backup Port: Micro-USB
- Voltage: DC 4.5 - 6.0 V
- Operating Temperature: -10°C - 60°C
- Operating Humidity: 10% - 95% RH

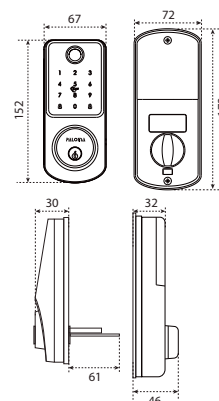

Features

Multiple Access

- Smartphone App (Android & iOS)
- Fingerprint
- PIN Code
- RFID Card: MIFARE 13.56 Mhz
- Mechanical Key

User Management

- 9 Admins & 291 Users
- 10 Repeat Schedule Users
- Unlocking Records & Notification

Easy Operation


- Touch Screen
- Passage Mode
- Magnetic Sensor (Optional)

High Security

- Automatic Locking
- Mortise SUS 304
- With Privacy Button
- Hardened Solid Deadbolt
- Dual Verification Mode
- Anti-Theft Fake PIN
- Dust & Splash Proof

Battery

- Low Battery Notification
- Alkaline AA x 4pcs
- Micro-USB Backup Port



Supported by




DLP 4130YBK: Black (Tuya Wi-Fi)



Specification

- Panel material: Aluminium alloy, tempered glass
- Mortise: Deadbolt type, backset adjustable 60/70mm
- Cylinder & Key: Full brass
- Fingerprint sensor: Semiconductor capacitive (FPC Sweden)
- RFID reader: Non-contact induction (MIFARE 1K 13.56 Mhz)
- Numpad: Touchscreen
- Power Backup Port: Type-C
- Voltage: DC 4.5 - 6.0 V
- Operating Temperature: -20°C - 50°C
- Operating Humidity: 10% - 95% RH

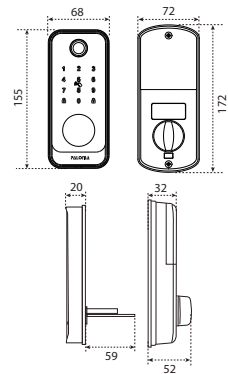

Features

Multiple Access

- Smartphone App (Android & iOS)
- Fingerprint
- PIN Code
- RFID Card: MIFARE 13.56 Mhz
- Mechanical Key

User Management

- 300 Total access points
- 9 Admins & 291 Users
- Unlocking Records & Notification

Easy Operation


- Touch Screen
- Passage Mode
- Magnetic Sensor

High Security

- Automatic Locking
- Mortise Full SUS 304
- With Privacy Button
- Hardened Solid Deadbolt
- Dual Verification Mode
- Anti-Theft Fake PIN
- Dust & Splash Proof

Battery

- Low Battery Notification
- Alkaline AA x 4pcs
- Type-C Backup Port



Supported by



Smart Cylinder 701



DLP 701B: Black (Tuya Bluetooth)




Capacity Admin & User

Fingerprint : max 100
RFID Card : max 200

Fingerprint + RFID Card : max 200

Specification

- Panel material: Aluminium alloy, brass and stainless steel SUS 304
- Cylinder & Key: Full brass, high security grade
- Fingerprint sensor: Semiconductor capacitive (FPC Sweden)
- RFID reader: Non-contact induction (MIFARE 1K 13.56 Mhz)
- Power Backup Port: Type-C
- Voltage: DC 4.5 - 6.0 V
- Operating Temperature: -10°C - 60°C
- Operating Humidity: 10% - 95% RH

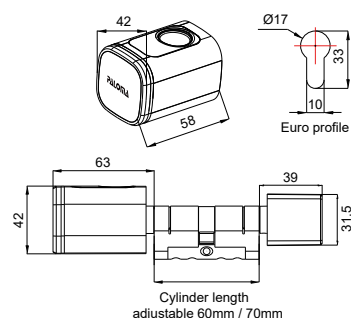

Features

Multiple Access

- Smartphone App (Android & iOS)
- Fingerprint
- RFID Card: MIFARE 13.56 Mhz
- Mechanical Key

High Security

- High Security Cylinder
- High Security Mechanical Key
- Dual Verification Mode

User Management


- 200 Total Access Points
- Admin & User
- Unlocking Records & Notification

Battery

- Lithium Battery CR123A x 1pc
- Low Battery Notification
- Type-C Backup Port

Easy Operation

- Passage Mode
- Easy Installation
- Cylinder Length Adjustable 60/70mm
- TUYA Gateway Ready (not included)



DLP 701S: Silver (Tuya Bluetooth)




Capacity Admin & User

Fingerprint : max 100
RFID Card : max 200

Fingerprint + RFID Card : max 200

Specification

- Panel material: Aluminium alloy, brass and stainless Steel SUS 304
- Cylinder & Key: Full brass, high security grade
- Fingerprint sensor: Semiconductor capacitive (FPC Sweden)
- RFID reader: Non-contact induction (MIFARE 1K 13.56 Mhz)
- Power Backup Port: Type-C
- Voltage: DC 4.5 - 6.0 V
- Operating Temperature: -10°C - 60°C
- Operating Humidity: 10% - 95% RH

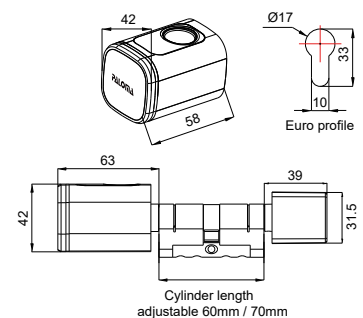

Features

Multiple Access

- Smartphone App (Android & iOS)
- Fingerprint
- RFID Card: MIFARE 13.56 Mhz
- Mechanical Key

High Security

- High Security Cylinder
- High Security Mechanical Key
- Dual Verification Mode

User Management

- 200 Total Access Points
- Admin & User
- Unlocking Records & Notification

Battery

- Lithium Battery CR123A x 1pc
- Low Battery Notification
- Type-C Backup Port

Easy Operation

- Passage Mode
- Easy Installation
- Cylinder Length Adjustable 60/70mm
- TUYA Gateway Ready (not included)

Supported by



Digital Lock

2100

Series





SEMICONDUCTOR BIOMETRIC

Fast fingerprint identification.

Accurate reading in all orientation 360°.



HIGH HARDNESS TEMPERED GLASS

Tough and scratch
resistant.







CHILD-PROOF INSIDE HANDLE

FINGERPRINT ON HANDLE



USB TYPE-C BACKUP PORT



DIGITAL LOCK
WITH CAMERA
AS DOOR VIEWER

SEND GUEST PHOTO
TO PHONE




DLP 2138: Black (Tuya Wi-Fi)



Specification

- Panel material: Aluminium alloy, tempered glass
- Mortise: Full stainless steel SUS 304, backset 60mm
- Cylinder & Key: Full brass, high security grade
- Fingerprint sensor: Semiconductor capacitive (FPC Sweden)
- RFID reader: Non-contact induction (MIFARE 1K 13.56 Mhz)
- Numpad: Touchscreen
- Power Backup Port: Micro-USB
- Voltage: DC 4.5 - 6.0 V
- Operating Temperature: -10°C - 60°C
- Operating Humidity: 10% - 95% RH

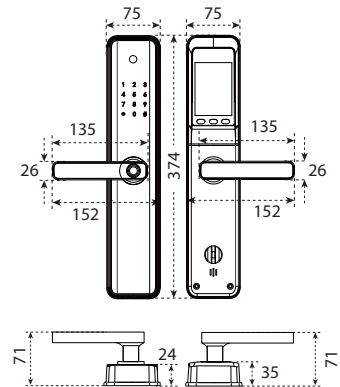

Features

Multiple Access

- Smartphone App (Android & iOS)
- Fingerprint
- PIN Code
- RFID Card: MIFARE 13.56 Mhz
- Mechanical Key

User Management

- 9 Admins & 291 Users
- 10 Repeat Schedule Users
- Unlocking Records & Notification

Easy Operation



- Camera as Door Viewer
- Send Guest Photo to Phone
- Turn Up Handle for Deadbolt
- Passage Mode

High Security

- Automatic Locking
- Mortise Full SUS 304
- With Privacy Deadbolt
- Hardened Solid Deadbolt
- High Security Cylinder & Key
- Dual Verification Mode
- Anti-Theft Fake PIN
- Anti-Burglar Alarm
- Dust & Splash Proof

Battery

- Low Battery Notification
- Alkaline AA x 4pcs or 8pcs
- Micro-USB Backup Port

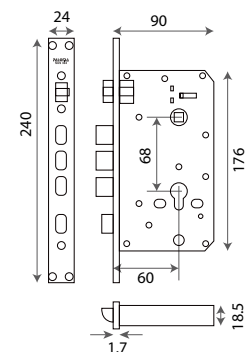

DLP 2131: Black (Tuya Wi-Fi)

DLP 2136: Black (No App)

Door Thickness:
32mm - 130mm

Door Frame:
Min. 105mm

Capacity Admin & User


Fingerprint : max 100
RFID Card : max 300
PIN Code : max 300

Fingerprint
+ RFID Card
+ PIN Code : max 300



Specification

- Panel material: Aluminium alloy, tempered glass
- Mortise: Full stainless steel SUS 304, backset 60mm
- Cylinder & Key: Full brass, high security grade
- Fingerprint sensor: Semiconductor capacitive (FPC Sweden)
- RFID reader: Non-contact induction (MIFARE 1K 13.56 Mhz)
- Numpad: Touchscreen
- Power Backup Port: Micro-USB
- Voltage: DC 4.5 - 6.0 V
- Operating Temperature: -10°C - 60°C
- Operating Humidity: 10% - 95% RH

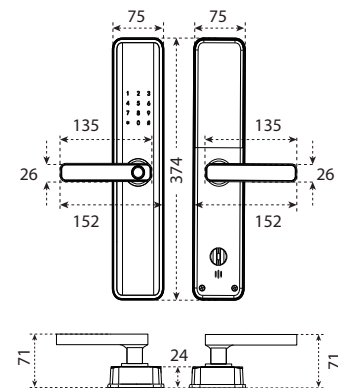

Features

Multiple Access

- Smartphone App (Android & iOS)
- Fingerprint
- PIN Code
- RFID Card: MIFARE 13.56 Mhz
- Mechanical Key

User Management

- 9 Admins & 291 Users
- 10 Repeat Schedule Users
- Unlocking Records & Notification

Easy Operation


- Fingerprint on Handle
- Touch Screen
- Turn Up Handle for Deadbolt
- Passage Mode

High Security

- Automatic Locking
- Mortise Full SUS 304
- With Privacy Deadbolt
- Hardened Solid Deadbolt
- High Security Cylinder & Key
- Dual Verification Mode
- Anti-Theft Fake PIN
- Anti-Burglar Alarm
- Dust & Splash Proof

Battery

- Low Battery Notification
- Alkaline AA x 4pcs or 8pcs
- Micro-USB Backup Port

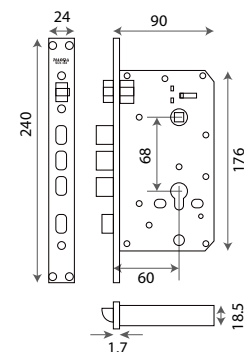

Supported by



DLP 2101: Titanium Grey (Tuya Wi-Fi)

Door Thickness:
35mm - 50mm
up to 90mm with extra parts

Door Frame:
Min. 105mm

Capacity Admin & User


Fingerprint : max 100
RFID Card : max 300
PIN Code : max 300

Fingerprint
+ RFID Card
+ PIN Code : max 300



Specification

- Panel material: Aluminium alloy, polycarbonate
- Mortise: Full stainless steel SUS 304, backset 60mm
- Cylinder & Key: Full brass, high security grade
- Fingerprint sensor: Semiconductor capacitive (FPC Sweden)
- RFID reader: Non-contact induction (MIFARE 1K 13.56 Mhz)
- Numpad: Touchscreen
- Power Backup Port: USB type-C
- Voltage: DC 4.5 - 6.0 V
- Operating Temperature: -10°C - 60°C
- Operating Humidity: 10% - 95% RH

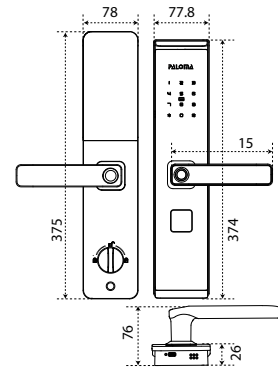

Features

Multiple Access

- Smartphone App (Android & iOS)
- Fingerprint
- PIN Code
- RFID Card: MIFARE 13.56 Mhz
- Mechanical Key

User Management


- 9 Admins & 291 Users
- 10 Temporary Users
- Unlocking Records & Notification

Easy Operation

- Fingerprint on Handle
- Touch Screen
- Turn Up Handle for Deadbolt
- Passage Mode

High Security

- Automatic Locking
- Mortise Full SUS 304
- With Privacy Deadbolt
- Hardened Solid Deadbolt
- High Security Cylinder & Key
- Dual Verification Mode
- Anti-Theft Fake PIN
- Anti-Burglar Alarm
- Child Proof Inside Handle
- Dust & Splash Proof



Battery

- Low Battery Notification
- Alkaline AA x 4pcs
- USB Type-C Backup Port

Supported by



Digital Lock 3100



1 2 3
4 5 6
7 8 9
* 0 #

PALOMA



DLP 3131YMB: Matte Black (Tuya Wi-Fi) DLP 3131NMB: Matte Black (No App)


Door Thickness:
35mm - 75mm

Door Frame:
Min. 76mm

Capacity Admin & User



Fingerprint : max 100
RFID Card : max 200
PIN Code : max 200

Fingerprint
+ RFID Card
+ PIN Code : max 300

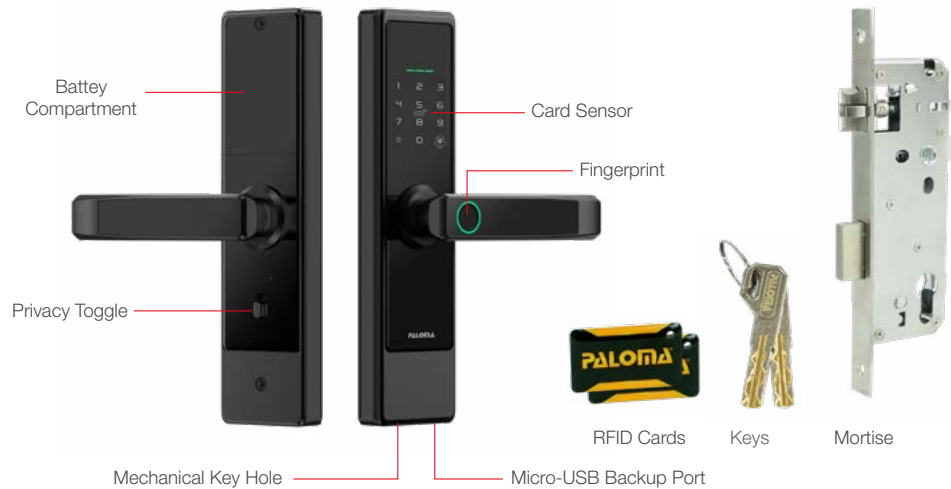

Specification

- Panel material: Aluminium alloy, tempered glass
- Mortise: Stainless steel SUS 304, backset 45mm
- Cylinder & Key: Full brass, high security grade
- Fingerprint sensor: Semiconductor capacitive (FPC Sweden)
- RFID reader: Non-contact induction (MIFARE 1K 13.56 Mhz)
- Numpad: Touchscreen
- Power Backup Port: Type-C
- Voltage: DC 5.0 - 6.0 V
- Operating Temperature: -25°C - 60°C
- Operating Humidity: 20% - 90% RH



Features

Multiple Access

- Smartphone App (Android & iOS)
- Fingerprint
- PIN Code
- RFID Card: MIFARE 13.56 Mhz
- Mechanical Key

User Management

- 9 Admins & 291 Users
- 10 Repeat Schedule Users
- Unlocking Records & Notification

Easy Operation

- Fingerprint on Handle
- Turn Up Handle for Deadbolt
- Passage Mode
- Door Bell

High Security

- Automatic Locking
- Mortise SUS 304
- With Privacy Toggle
- Hardened Solid Deadbolt
- High Security Cylinder & Key
- Dual Verification Mode
- Anti-Theft Fake PIN
- Dust & Splash Proof

Battery

- Low Battery Notification
- Alkaline AA x 4pcs
- Type-C Backup Port

Supported by





DLP 3121: Black (Tuya Wi-Fi)

Door Thickness:
33mm - 60mm

Door Frame:
Min. 85mm

Capacity Admin & User



Fingerprint : max 100
RFID Card : max 300
PIN Code : max 300

Fingerprint
+ RFID Card
+ PIN Code : max 300



Specification

- Panel material: Aluminium alloy, tempered glass
- Mortise: Stainless steel SUS 304, backset 50mm
- Cylinder & Key: Full brass, high security grade
- Fingerprint sensor: Semiconductor capacitive (FPC Sweden)
- RFID reader: Non-contact induction (MIFARE 1K 13.56 Mhz)
- Numpad: Touchscreen
- Power Backup Port: Micro-USB
- Voltage: DC 4.5 - 6.0 V
- Operating Temperature: -10°C - 60°C
- Operating Humidity: 10% - 95% RH



Features

Multiple Access

- Smartphone App (Android & iOS)
- Fingerprint
- PIN Code
- RFID Card: MIFARE 13.56 Mhz
- Mechanical Key

User Management

- 9 Admins & 291 Users
- 10 Repeat Schedule Users
- Unlocking Records & Notification

Easy Operation

- Fingerprint on Handle
- Turn Up Handle for Deadbolt
- Passage Mode
- Door Bell

High Security

- Automatic Locking
- Mortise SUS 304
- With Privacy Toggle
- Hardened Solid Deadbolt
- Dual Verification Mode
- Anti-Theft Fake PIN
- Dust & Splash Proof

Battery

- Low Battery Notification
- Alkaline AA x 4pcs
- Micro-USB Backup Port


Supported by



Digital Lock 516



DLP 516B: Black (Tuya Wi-Fi)

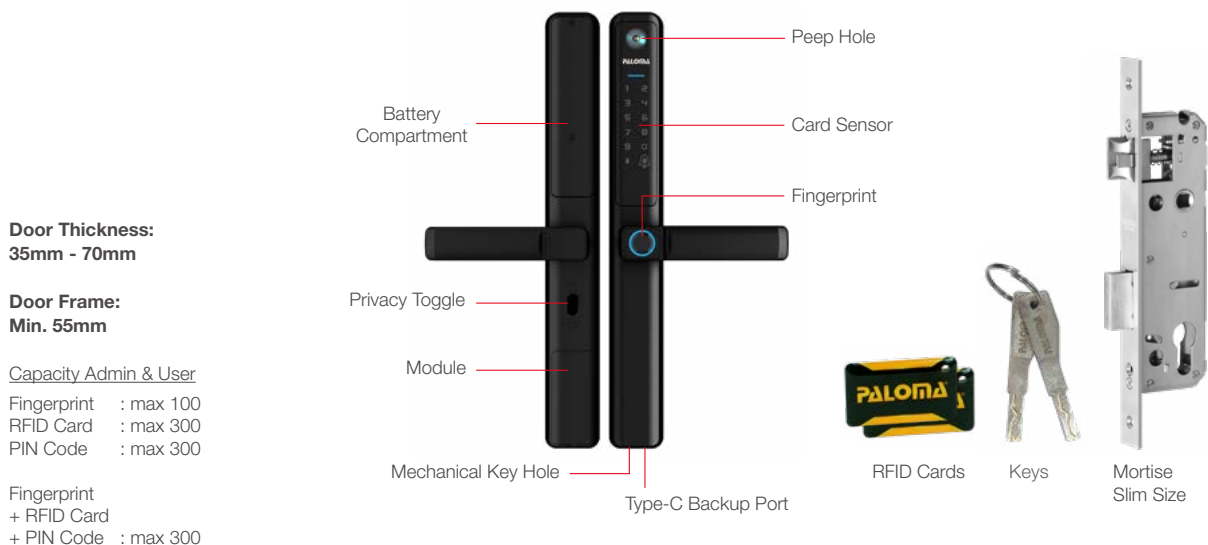

Specification

- Panel material: Aluminium alloy, tempered glass
- Mortise: Stainless steel SUS 304, backset 35mm
- Cylinder & Key: Full brass, high security grade
- Fingerprint sensor: Semiconductor capacitive (FPC Sweden)
- RFID reader: Non-contact induction (MIFARE 1K 13.56 Mhz)
- Numpad: Touchscreen
- Power Backup Port: Type-C
- Voltage: DC 4.5 - 6.0 V
- Operating Temperature: -20°C - 50°C
- Operating Humidity: 10% - 95% RH

Features

Multiple Access

- Smartphone App (Android & iOS)
- Fingerprint
- PIN Code
- RFID Card: MIFARE 13.56 Mhz
- Mechanical Key

User Management

- 9 Admins & 291 Users
- Unlocking Records & Notification

Easy Operation



- Turn Up Handle for Deadbolt
- Passage Mode
- Door Bell

High Security

- Automatic Locking
- With Privacy Toggle
- Mortise SUS 304
- Hardened Solid Deadbolt
- High Security Cylinder & Key
- Dual Verification Mode
- Anti-Theft Fake PIN
- Dust & Splash Proof

Battery

- Low Battery Notification
- Alkaline AA x 4pcs
- Type-C Backup Port

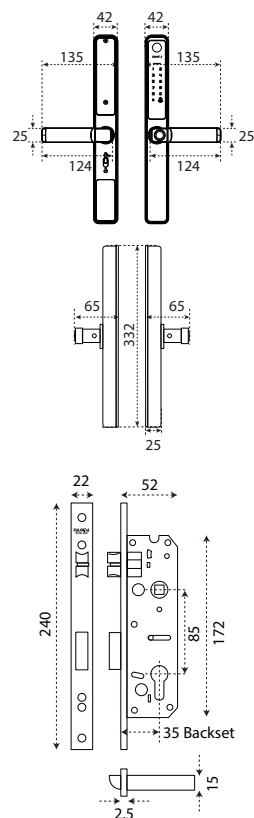

DLP 516S: Silver (Tuya Wi-Fi)


Door Thickness:
35mm - 70mm

Door Frame:
Min. 55mm

Capacity Admin & User


Fingerprint : max 100
RFID Card : max 300
PIN Code : max 300

Fingerprint
+ RFID Card
+ PIN Code : max 300

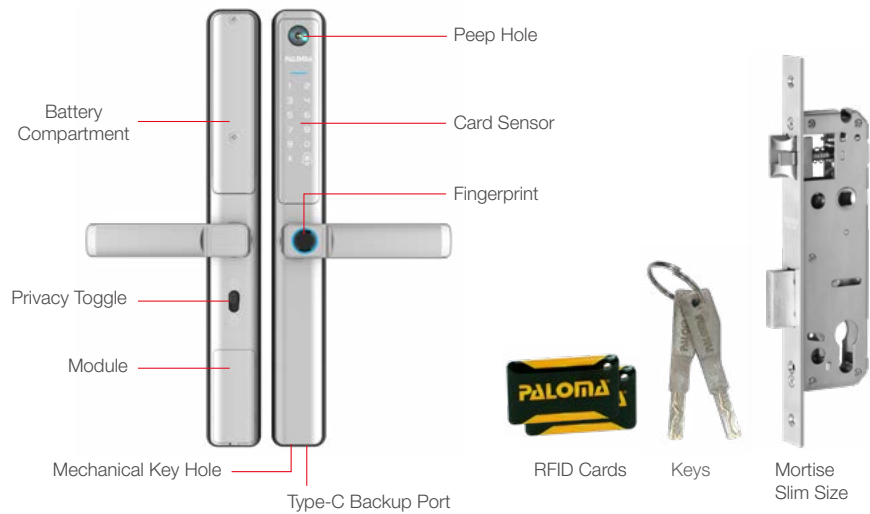

Specification

- Panel material: Aluminium alloy, tempered glass
- Mortise: Stainless steel SUS 304, backset 35mm
- Cylinder & Key: Full brass, high security grade
- Fingerprint sensor: Semiconductor capacitive (FPC Sweden)
- RFID reader: Non-contact induction (MIFARE 1K 13.56 Mhz)
- Numpad: Touchscreen
- Power Backup Port: Type-C
- Voltage: DC 4.5 - 6.0 V
- Operating Temperature: -20°C - 50°C
- Operating Humidity: 10% - 95% RH

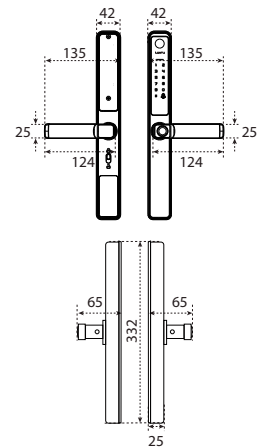

Features

Multiple Access

- Smartphone App (Android & iOS)
- Fingerprint
- PIN Code
- RFID Card: MIFARE 13.56 Mhz
- Mechanical Key

User Management

- 9 Admins & 291 Users
- Unlocking Records & Notification

Easy Operation


- Turn Up Handle for Deadbolt
- Passage Mode
- Door Bell

High Security

- Automatic Locking
- With Privacy Toggle
- Mortise SUS 304
- Hardened Solid Deadbolt
- High Security Cylinder & Key
- Dual Verification Mode
- Anti-Theft Fake PIN
- Dust & Splash Proof

Battery

- Low Battery Notification
- Alkaline AA x 4pcs
- Type-C Backup Port

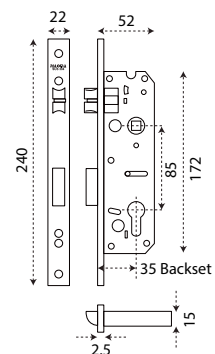

Supported by



Digital Lock 5100



PALOMA

1 2

3 4

5 6

7 8

9 0

* #

Card

PALOMA 050

DLP 5121: Matte Black (Tuya Wi-Fi)

Door Thickness:
30mm - 60mm

Door Frame:
Min. 51mm

Capacity Admin & User


Fingerprint : max 100
RFID Card : max 300
PIN Code : max 300

Fingerprint
+ RFID Card
+ PIN Code : max 300



Specification

- Panel material: Full stainless steel SUS 304, acrylic
- Mortise: Stainless steel SUS 304, backset 35mm
- Cylinder & Key: Full brass, high security grade
- Fingerprint sensor: Semiconductor capacitive (FPC Sweden)
- RFID reader: Non-contact induction (MIFARE 1K 13.56 Mhz)
- Numpad: Touchscreen
- Power Backup Port: Micro-USB
- Voltage: DC 4.5 - 6.0 V
- Operating Temperature: -10°C - 60°C
- Operating Humidity: 10% - 95% RH

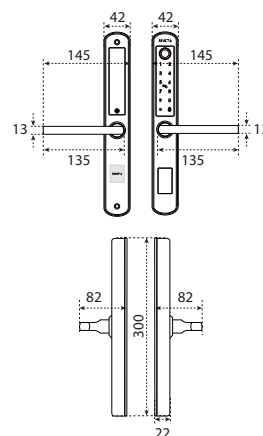

Features

Multiple Access

- Smartphone App (Android & iOS)
- Fingerprint
- PIN Code
- RFID Card: MIFARE 13.56 Mhz
- Mechanical Key

User Management

- 9 Admins & 291 Users
- 10 Repeat Schedule Users
- Unlocking Records & Notification

Easy Operation


- Turn Up Handle for Deadbolt
- Passage Mode
- Door Bell

High Security

- Automatic Locking
- Mortise SUS 304
- Hardened Solid Deadbolt
- High Security Cylinder & Key
- Dual Verification Mode
- Anti-Theft Fake PIN
- Dust & Splash Proof

Battery

- Low Battery Notification
- Alkaline AAA x 4pcs
- Micro-USB Backup Port

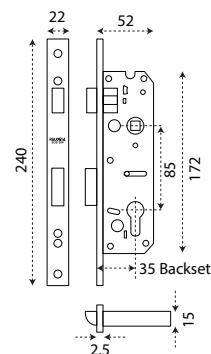

Supported by



DLP 5122: Satin + Polished (Tuya Wi-Fi)

Door Thickness:
30mm - 60mm

Door Frame:
Min. 51mm

Capacity Admin & User


Fingerprint : max 100
RFID Card : max 300
PIN Code : max 300

Fingerprint
+ RFID Card
+ PIN Code : max 300



Specification

- Panel material: Full stainless steel SUS 304, acrylic
- Mortise: Stainless steel SUS 304, backset 35mm
- Cylinder & Key: Full brass, high security grade
- Fingerprint sensor: Semiconductor capacitive (FPC Sweden)
- RFID reader: Non-contact induction (MIFARE 1K 13.56 Mhz)
- Numpad: Touchscreen
- Power Backup Port: Micro-USB
- Voltage: DC 4.5 - 6.0 V
- Operating Temperature: -10°C - 60°C
- Operating Humidity: 10% - 95% RH

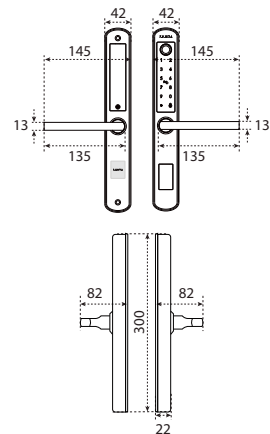

Features

Multiple Access

- Smartphone App (Android & iOS)
- Fingerprint
- PIN Code
- RFID Card: MIFARE 13.56 Mhz
- Mechanical Key

User Management

- 9 Admins & 291 Users
- 10 Repeat Schedule Users
- Unlocking Records & Notification

Easy Operation


- Turn Up Handle for Deadbolt
- Passage Mode
- Door Bell

High Security

- Automatic Locking
- Mortise SUS 304
- Hardened Solid Deadbolt
- High Security Cylinder & Key
- Dual Verification Mode
- Anti-Theft Fake PIN
- Dust & Splash Proof

Battery

- Low Battery Notification
- Alkaline AAA x 4pcs
- Micro-USB Backup Port

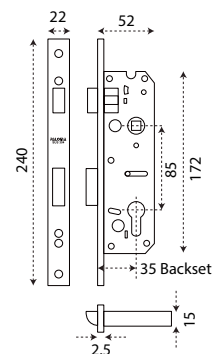

Supported by





